Rule Game Server Update

March 29 - April 5, 2021

[Documentation](#):

- http://sapir.psych.wisc.edu:7150/w2020/ -- Production (v 1.*)
- http://sapir.psych.wisc.edu:7150/w2020-dev/ -- Development (v 2.*)

Overall Game Server Architecture

Web browser on the player's PC

GUI client
http://sapir/rule-game/prod

sapir

Rule Game Server
http://sapir:7150/w2020

Game Engine

Experiment control files
/opt/tomcat/game-data

Experiment result files
/opt/tomcat/saved

MySQL database
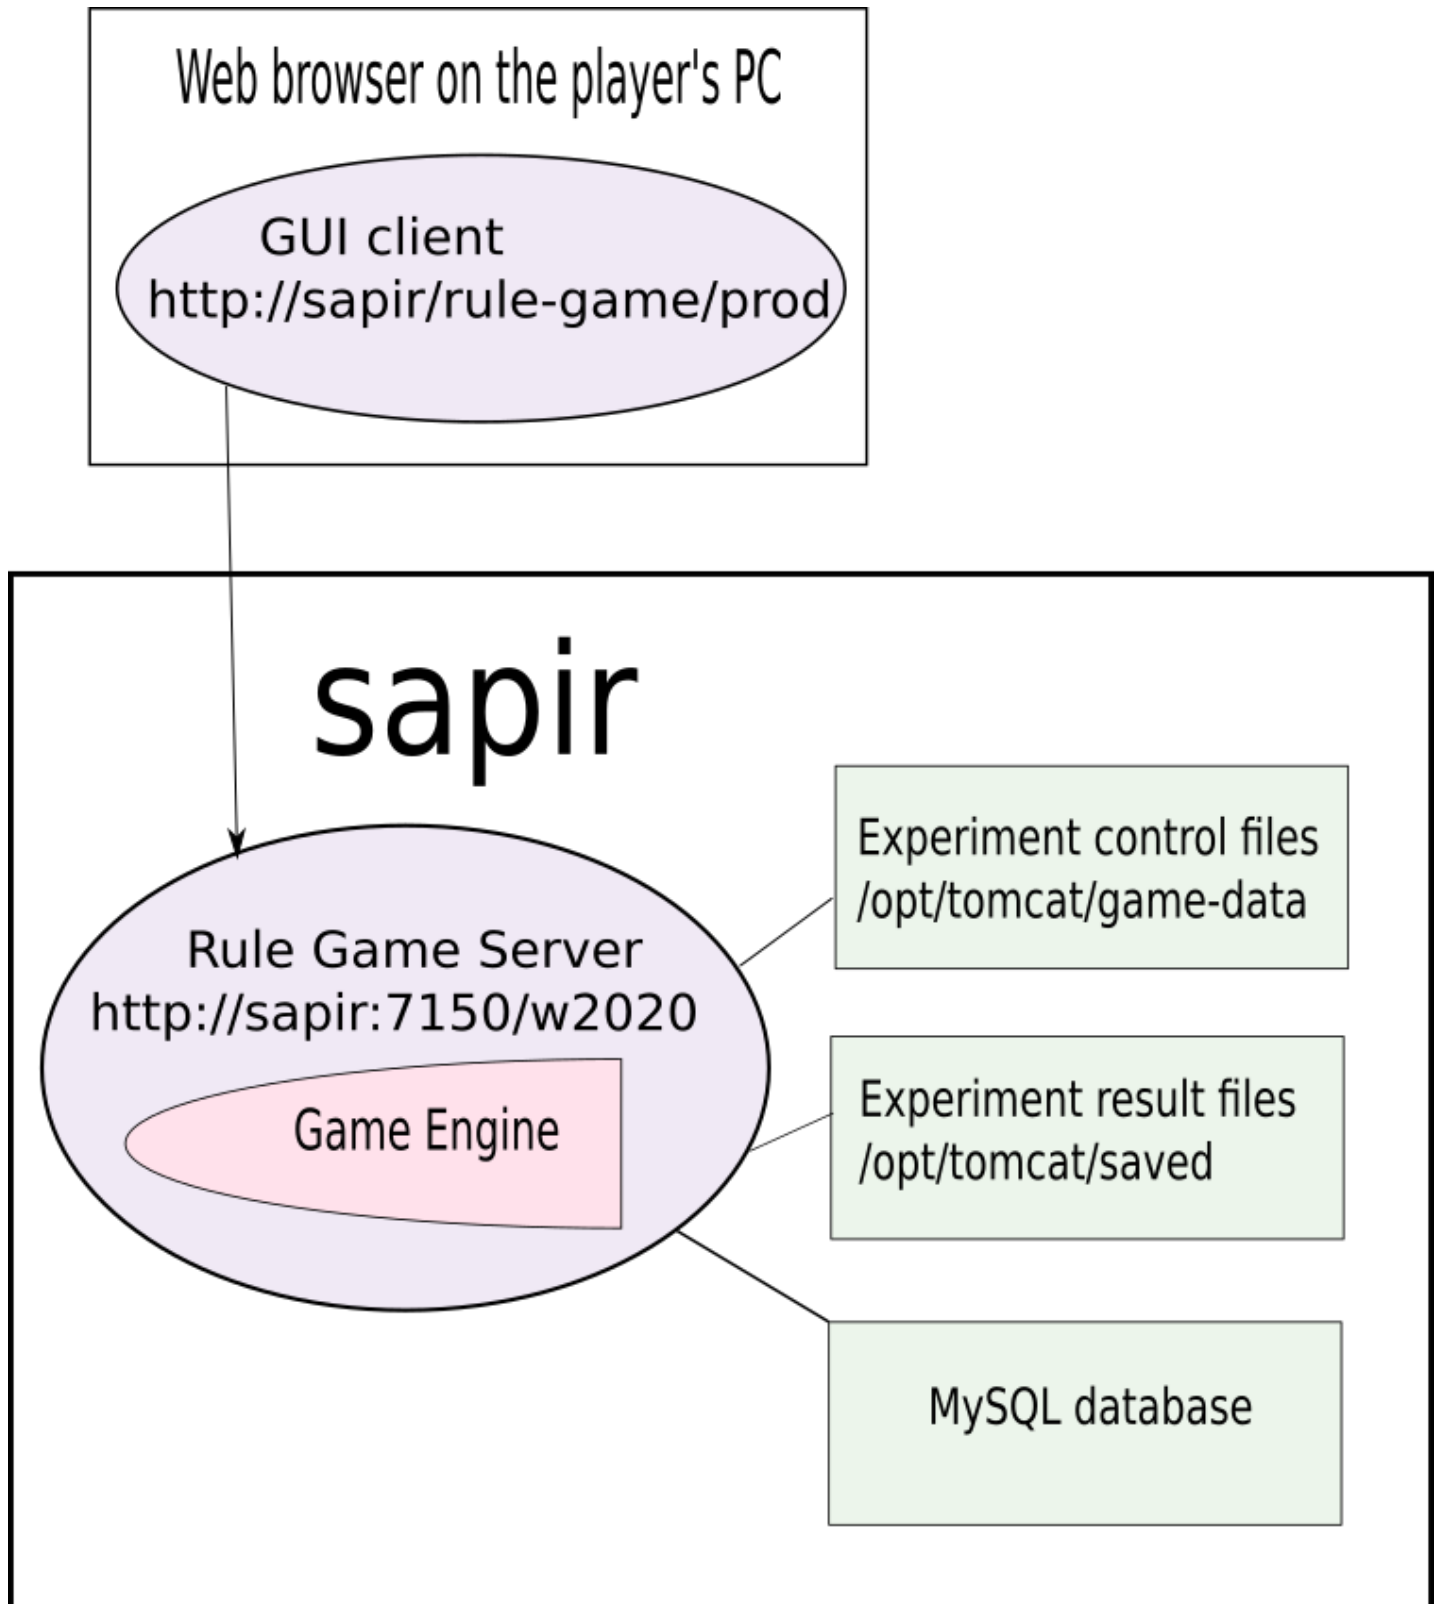
What's new in Game Server 2.*

- Custom colors
- Custom shapes
- Subdirectories
- "Pick" operation
- New balancer
- Rule syntax enhancements
- Experiment plan validator
- Version check
- Backward compatibility
- Captive Game Server can emulate Web Game Server more closely

Custom colors and shapes

- [Use arbitrary colors names](#)
- List colors in the color map file
- [Use arbitrary shape names](#) (subdir OK)
- Provide an SVG file for each shape (maybe in a subdir)

Structure of an [experiment plan](#)

Experiment control files:
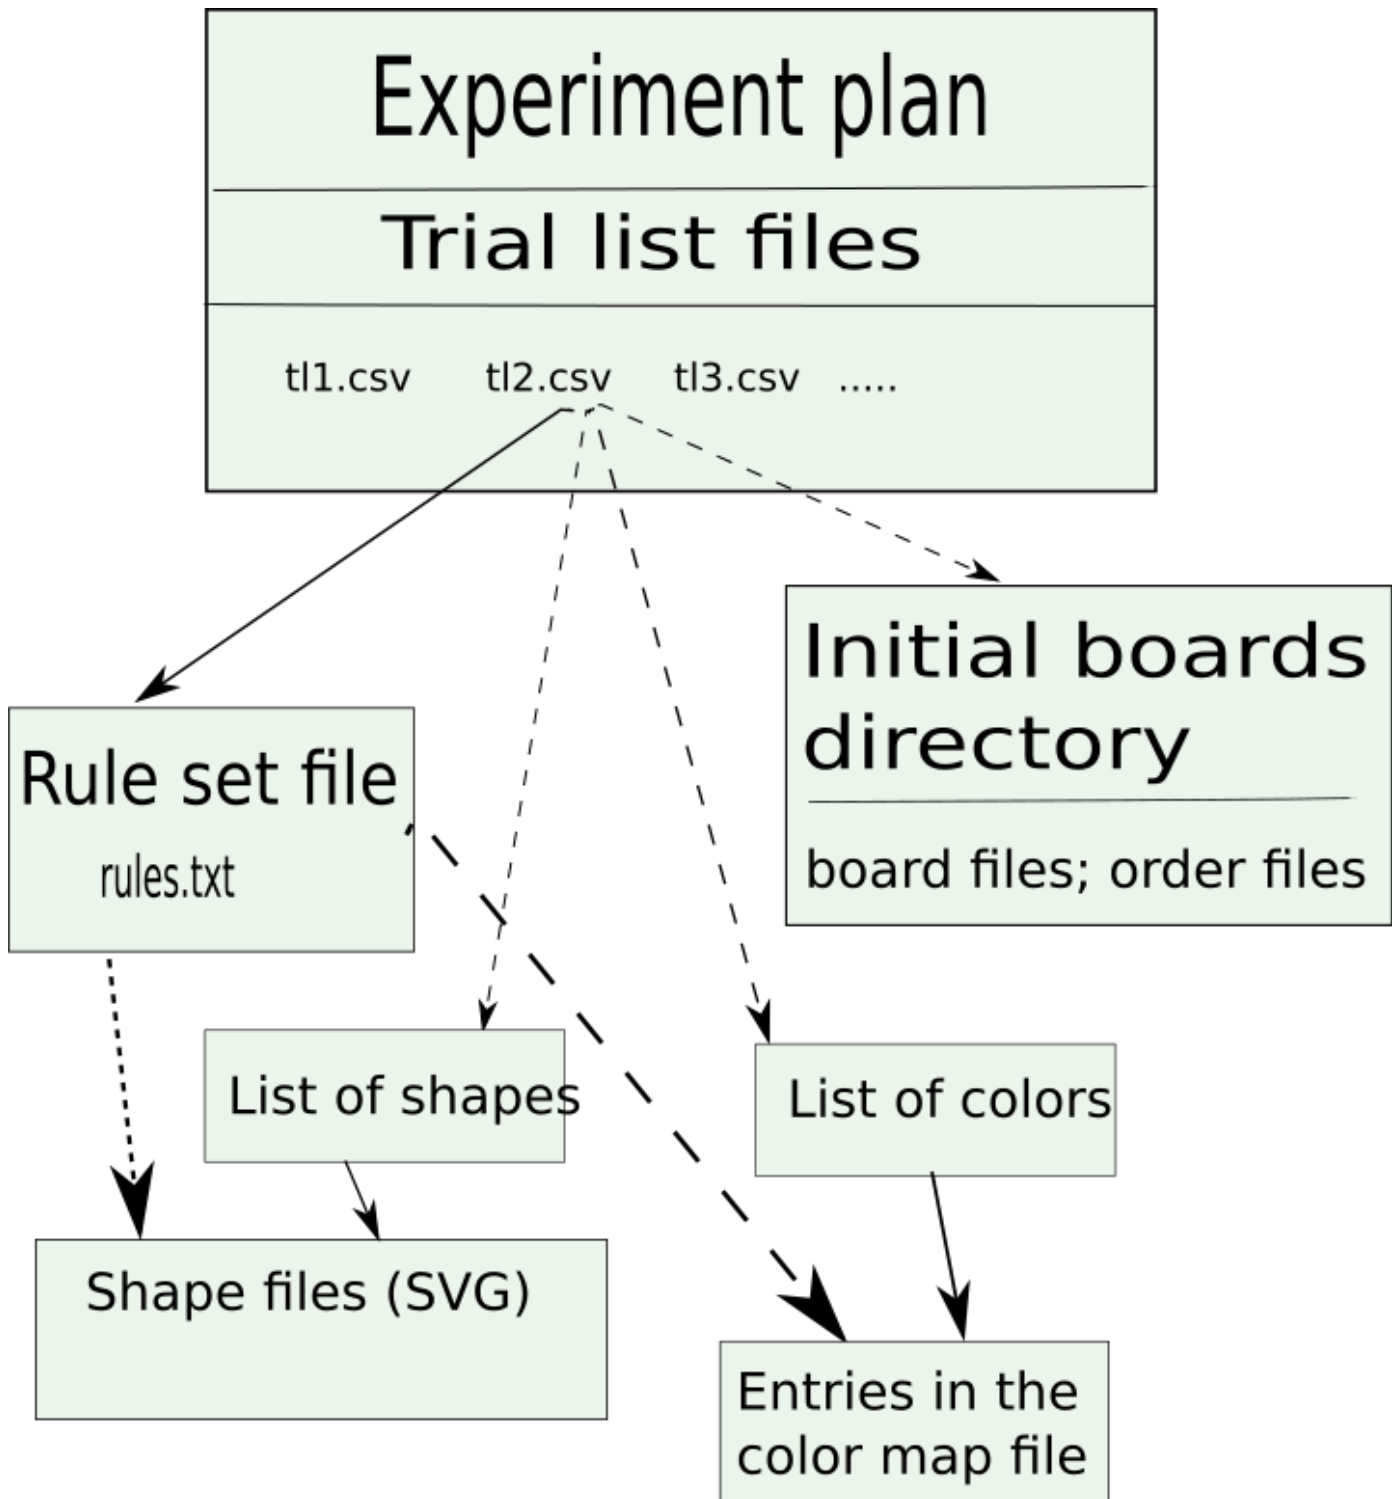
You can use subdirectories

- For each kind of files, a directory under `/opt/tomcat/game-data`:
    - `trial-lists`
    - `rules`
    - `boards`
    - `shapes`
- For each experiment, you can use an experiment-specific subdirectory for...
    - rule set files
    - initial board files
    - shape files
- A single color map file for all colors, though
- More manageable data for multiple experiments

Very limited use of wwildcards: In trial list files, to use all shapes from a directory:

```
...,shapes,...
...,tigers/*,...
```

"Pick" operation

- New trial list parameters to control user experience:
  - `feedback_switches=fixed`: the player sees which game pieces are movable
  - `feedback_switches=free`: the player does not know which pieces are movable until he tries
  - `free_wrong_cost=0.3`: the cost of a move attempt ("pick") on an immovable piece
- The new version of GUI client supports this.

New balancer

- Automatic "balancing" when assigning new players to trial lists
- Old: goal = equalize the number of players initially assigned to each trial list
- New: goal = equalize the number of players "active" in each trial list
- "Active player" = either
  - Received a completion code
  - Very recently registered, and, hopefully, still playing
- Experiment manager can create a "defect file" to e.g. account for players who received a completion code, but should be ignored

[Rule syntax]{.underline} **enhancements**

An *atom* of a rule line:

(*count*, *shapes*, *colors*, *positions*, *buckets*)

All-new destination bucket arithmetic:

- Set arithmetic: every expression is interpreted as a set
- Variables such as *p,pc,ps* evaluate to an empty set [] or a set of 1 element
- Set union: [S1, S2]
- Arithmetic on sets produces a cross product:
  - [] + [x,y] = []
  - [a] + [x,y] = [a+x,a+y]
  - [a,b] + [x,y] = [a+x,a+y,b+x,b+y]
- Equality operation: [x1,x2,...]==[y1,y2,...] gives:
  - empty set [] (if the two sets have no elements in common);
  - [1] (if the two sets have at least one common element).
- Negation:
  - ![] gives [1];
    ![any non-empty set] gives [].
- Modulo-4 postprocessing:
  - `Nearby+[1,3]` : identify the bucket X closest to the object; use eithers of the two buckets closest to X
- Can do fairly complex logic, e.g.
  - `[!p*[0,1,2,3], !!p*(p+1)]` : start with any bucket, then continue clockwise

Experiment plan validator

You have created an experiment plan?

[Test it!](#)

The validator checks the presence of all files, rule syntax, etc

Version check

You can check what version you're using

http://sapir.psych.wisc.edu/rule-game/dev/?version=true

```
Client Version [environment-commitHash]: dev-f6639a9edaaf6dd6fa2c07ba8
Server URL: http://sapir.psych.wisc.edu:7150/w2020-dev
Server Version: 2.006
```

Backward compatibility

An older version of the GUI client will still work with the new (2.*) Game Server
- An older experiment plan (from the 1.* era) will still work correctly with the 2.* Game Server

---

- Prod:
  - Client: `http://sapir.psych.wisc.edu/rule-game/prod/`
  - Server: `http://sapir.psych.wisc.edu:7150/w2020`
- Dev:
  - Client: `http://sapir.psych.wisc.edu/rule-game/dev/`
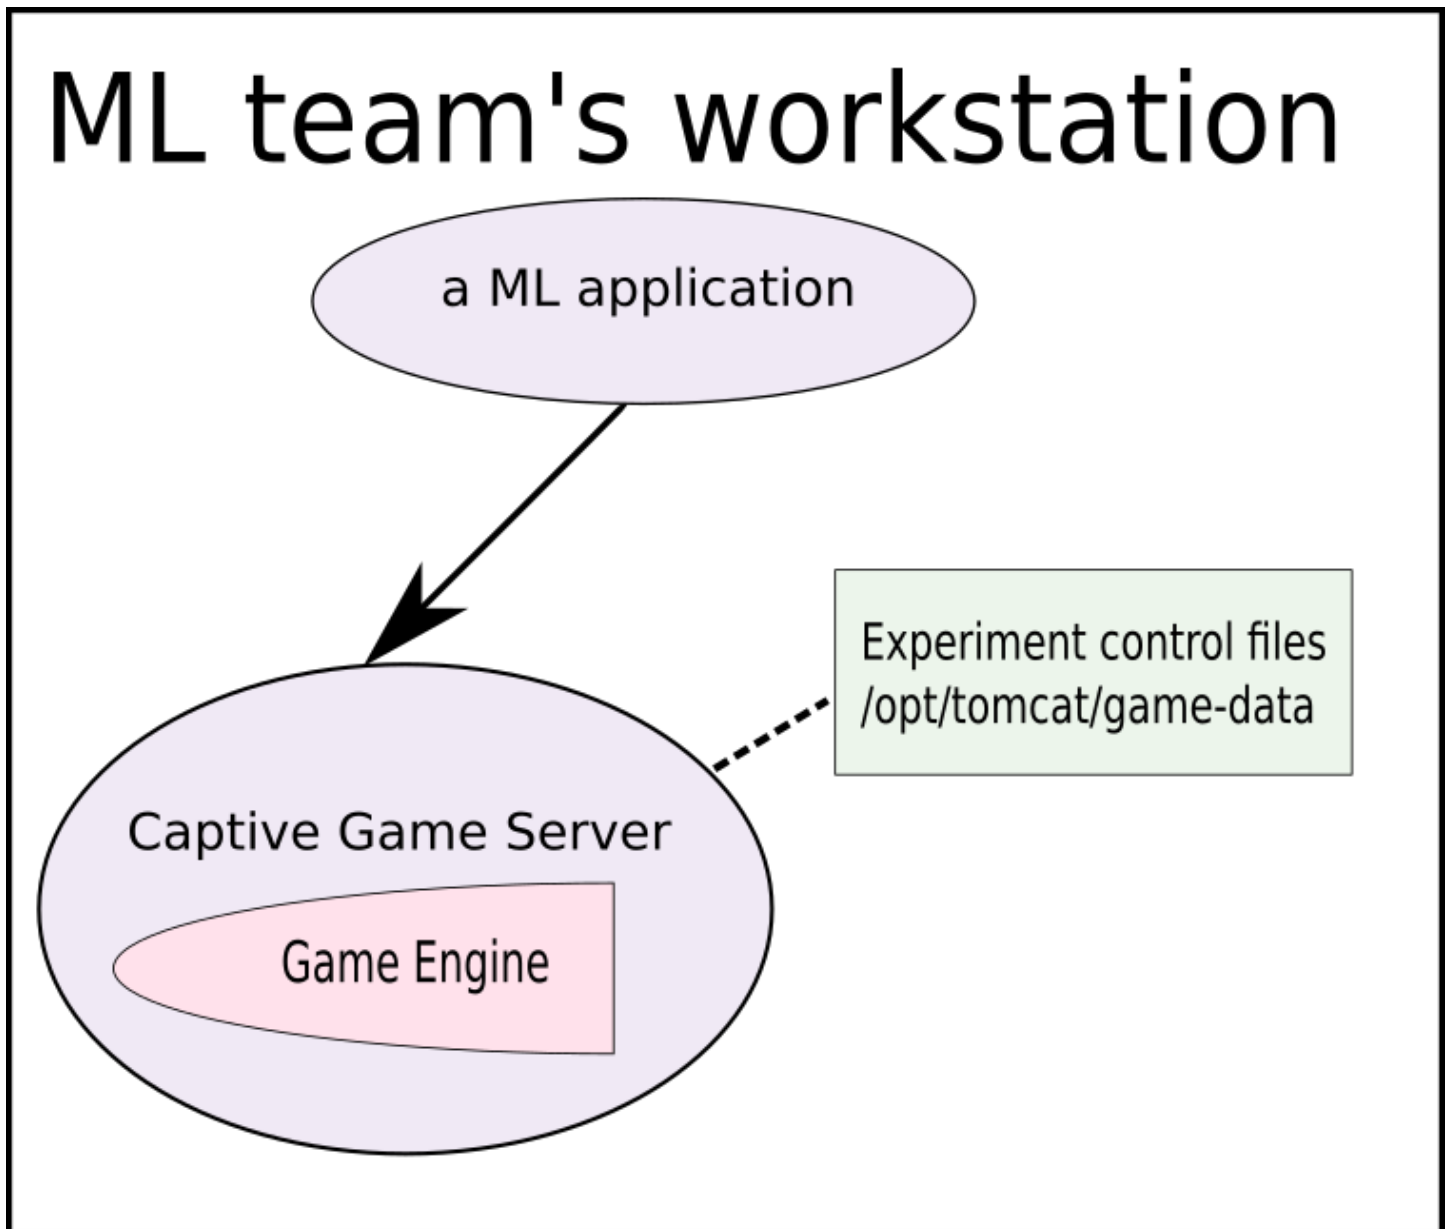 - Server: `http://sapir.psych.wisc.edu:7150/w2020-dev`

E.g.

- `http://sapir.psych.wisc.edu/rule-game/prod/?` `exp=`*`experiment_plan`*`&workerId=`*`new_unique_worker_id`*
- `http://sapir.psych.wisc.edu/rule-game/dev/?` `exp=`*`experiment_plan`*`&workerId=`*`new_unique_worker_id`*

Let's promote dev to prod

- Let's do a bit of testing on dev...
- and then promote it to prod!

New in the Captive Game Server

- Better compatibility with the human subject experience
- Can feed a trial list file to the Captive Game Server, and tell it to play as per the parameter set in a specific line.
  Not trying to emulate the flow control of human-subjects experiments:
    - transition between normal series and bonus series;
    - ending normal or bonus series
    - rewards

What's next in Game Server 3.*?

Looking for input on ...

[Wildcard syntax for a wider object space](#) - rules based on multiple features of objects